

KFC's Only Globally
Approved Extended Hot Hold



CVap® Flip Door Holding Cabinets

The only Globally Approved Extended Hot Hold Cabinet in the KFC System

Unmatched technology allows Globally Approved Hot Holding of
Original Recipe and Hot & Spicy in the same cabinet.

Dual Fans for
Improved Air
Circulation

Magnetic
Hinges

Easy Refilling
and Packing



HOV7-14SP

- One cabinet for all KFC products including OR, H&S, wings, and tenders, saving valuable kitchen space.
- Hold Original Recipe and Hot & Spicy in the same cabinet.
- Cook full catches without stress. Less labor, fewer cooks, more chicken, more sales.
- Powered by CVap® technology to deliver consistent food quality throughout extended holding.
- Flip-door, see-through design allows easy packing from the front, faster boxing, and instant inventory visibility.
- Durable, patent-pending magnetic hinges built to last in high-volume KFC kitchens.



HOV7-05SP

View Inventory
at a Glance




Approved for




CVap® Flip Door Holding Cabinets

HOV7-05SP Spec

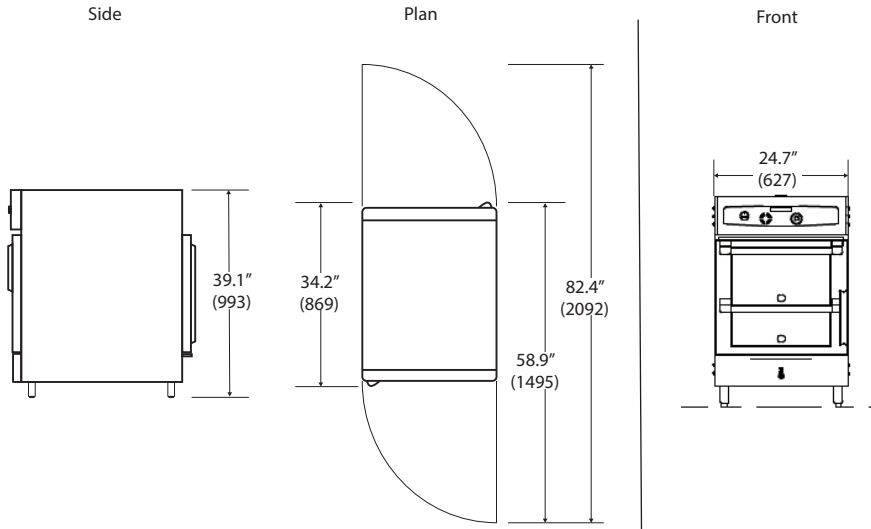

HOV7-14SP Spec

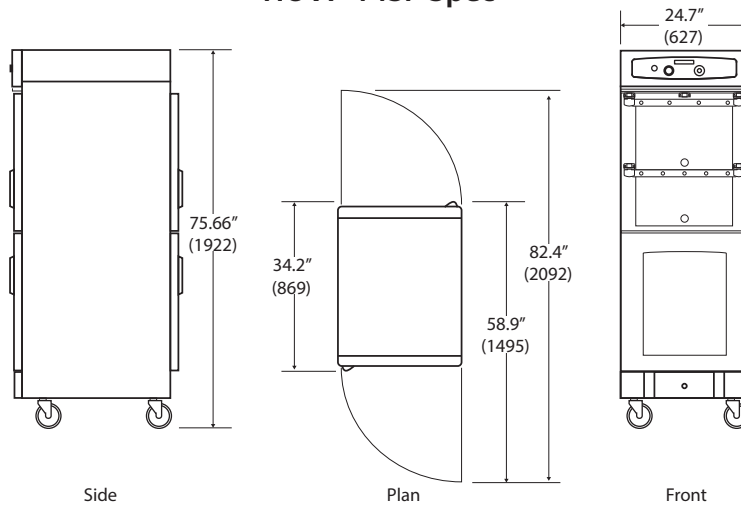

Drawings may not be to scale.

Model #	Capacity		Exterior Dimensions			Electrical					Door Config	
	Sheet Pan (18" x 26")	Half Sheet Pan (18" x 13")	Height IN.(MM)	Depth IN.(MM)	Width IN.(MM)	Volts	Phase	Watts	Amps	NEMA****	Front Door	Rear Door
HOV7-05SP-KI	5	10	39.10(993)**	34.23(869)	24.70(627)	230	1	2817	12.2	*****	Flip Door	Flip Door or Window
HOV7-14SP-KI	14	28	75.66(1922)***	34.23(869)	24.70(627)	230	1	4407	19.2	*****	Flip Door or Window Top/Window Bottom	Flip Door or Window Top/Window Bottom

International units ship with 4" legs. *Based on use of 5" heavy duty plate casters. | The input average of current did not exceed the allowable amperage for the circuit listed. *****International order shipped with cord, but without plug.

WATER FILL: Low water detection. Auto-fill included. Low mineral potable water recommended, otherwise use deionizer/demineralizer to minimize corrosion damage.

INSTALLATION REQUIREMENTS: Units to be installed with 2" (51mm) clearance on sides and may not be installed within proximity to anything emitting heat that would allow the exterior of the Winston cabinet to exceed surface temperatures of >200°F. Refer to owner's manual for specific installation requirements.

INDUSTRY COMPLIANT: Equipment complies with most international requirements; such as UL Sanitation, CE, MEA, EPA202, and others.

DRAIN: International locations will receive the standard front ball valve drain.

See winstonforum.com for standardized specification information.

